

SprintIR[®]-6S

GSS
Gas Sensing Solutions

- **High-Speed CO₂ sensor**
- **Up to 20 measurements per second**
- **Patented solid-state LED technology**
- **Fast response time**

About the SprintIR[®]-6S

The SprintIR[®]-6S is part of a range of CO₂ sensors designed to deliver unprecedented high-speed measurement capability. The SprintIR[®]-6S will take up to 20 readings per second, making it ideal for applications that require individual measurements at high repetition rates or where the CO₂ concentration is changing rapidly.

The SprintIR[®]-6S is fitted with a standard flow-through adaptor so the CO₂ gas can be passed over the optical sensor at high speed. Other customised adaptors are also possible depending on the installation requirements.


The SprintIR[®]-6S uses patented NDIR solid-state LED optical technology enabling the sensor to respond to rapidly changing CO₂ without compromising parametric performance.

Features

- 20 readings per second
- Optional customised flow adaptors
- Low-power CO₂ sensor
- Solid-state LED optical technology
- UART data interface
- Built-in auto-calibration

Applications

- Healthcare
- Food Packaging
- Sport Science
- CO₂ Fire Suppression Deployment

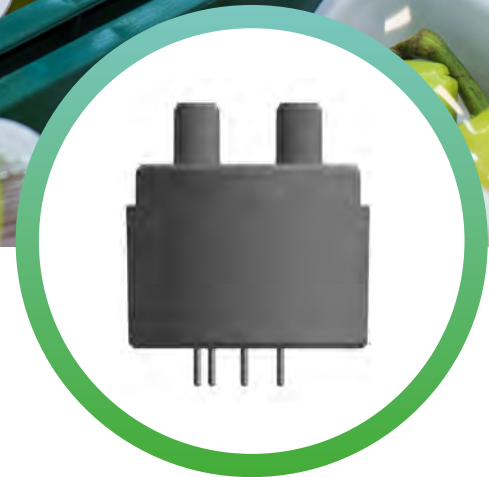

Ordering Information

SPRINTIR-6S - X - X

x	Measurement Range
5	0-5%
20	0-20%
60	0-60%
100	0-100%

x	Gas Cover
Blank	Flow through adaptor as standard
M	Membrane instead of flow adaptor

<https://www.gassensing.co.uk/product/sprintir-6s-co2-sensor/>



CO₂ Sensor Specifications

Measurement Ranges	0-5%, 0-20%, 0-60%, 0-100%
Accuracy (typ.)	0-60% ±(70ppm +5% of reading) 0-100% ±(300ppm +5% of reading)
Time to 1st Reading	<0.5 seconds
Response Time	Flow dependent
Readings per Second	20
Sample Method	Solid-state LED NDIR Diffusion

Electrical and Mechanical Specifications

Measurement Output	UART
Supply Voltage	3.25V to 5.5V
Power Consumption (typ.)	35mW @ 3.3V
Dimensions and Weight	ø23.8mm x 24mm, 7.5g

Operating Conditions

Operating Conditions - Temperature	0°C to 50°C
Operating Conditions - Humidity	0-95% RH, non-condensing
Storage Conditions - Temperature	-40°C to +70°C
Max Pressure Rating	0.3 barg
Sensor Lifetime	>15 years
Environmental Compliance	RoHS and REACH

Product Flyer- Document Version: 21/07/2020-002