

Molecular Leakage Detector

For Refrigerants A1 - A2L
in HVAC-R applications

The MLD is a cost effective, long life refrigerant gas detector, based on MPS technology, that reduces maintenance needs and allows the customer to have highly reliable product with the latest technology.

Highly flexible and reliable, this detector combines the Molecular Property Spectrometry technology with a specific electronic to provide the Modbus and the analog 4-20mA output.

It is also equipped with two relays (Alarm 1 and Alarm 2/Malfunction) to offer a clean signal that can be managed in an intuitive way.

It comes with 1,5 or 3 meters cable, without connector.




with NevadaNano MPS™
Technology inside



Part Number Definition

MLD-MN022-3

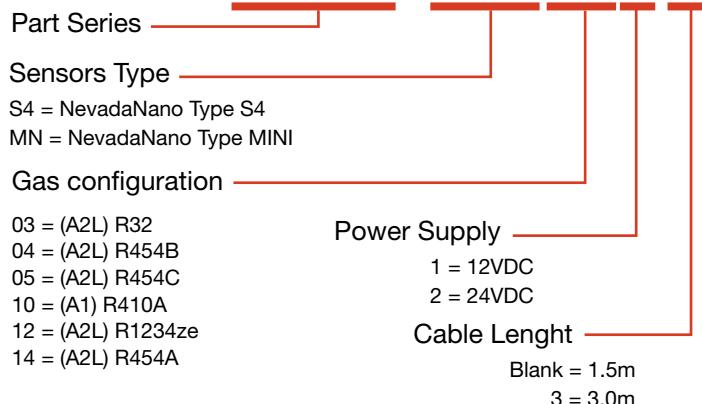

Features & Benefits

- No field calibration needed
- Immunity to poisoning
- No cross sensitivity
- Fail Safe (built in diagnostic)
- Long life (+15 years without calibration)
- Wide Temperature working range
- High accuracy with built-in Temperature, humidity and pressure sensors
- T - Rh - P values available as signals (Modbus)
- Multiple digital and analog output (Modbus, 4-20mA, 0,4-2Volt, Alarm Relays)

Applications

- HVAC Systems
- Refrigeration
- Cool Store
- Hotels ventilation system
- Home & Building automation
- Mobile HVAC units
- Railway conditioning

TECHNICAL FEATURES

Sensor Performances

Technology	Molecular Property Spectrometry by NevadaNano	
Gas detected	A1 R410A	A2L R32, R454A/B/C, R1234ze
Measurement range	1700-130.000ppm (static* condition) 5100-130.000 (dynamic condition)	3-100% LEL
Accuracy ISO817/ASHRAE 34	±11%	±3% LEL (R32 - R454A - R1234ze) ±5% LEL (R454B - R454C)
Accuracy UL 60335-2-40 ≤25% LEL 20°C, 50%RH	--	±2,5% LEL
Response Time	<12 sec.	<12 sec.
Response Time (T90)	<20 sec.	<20 sec. (R32 - R454B - R454C) <30 sec. (R454A - R1234ze)
Resolution	130ppm	0,1% LEL

Lifetime 15+ years

Detector Operating Features

Signals Output	Gas concentration, Status, Prealarm, Alarm, Fault, Lifetime, Pressure, Humidity, Temperature
Measurement Output	Modbus 4-20mA 0,1-2,9V 2x Relays
Visual Information	3x LED (Status, Prealarm, Alarm/Fault)
Supply Voltage	12-24VDC ±10%
Power Consumption	Avg. 50mA - Peak: 60mA (12VDC) 80mA (24VDC)
Operating Temperature	-40° to +70°C (12VDC) -40° to +60°C (24VDC)
Operating Humidity	0 - 100% RH
Operating Pressure	80 to 120 kPa
Protection grade	IP65
Dimensions MLD-MN	13 x 8 x 2,5 cm
Dimensions MLD-S4	13 x 8 x 4,0 cm
Certifications & Approvals	CE, EMC, Rohs, IEC60335-2-40, EN60079-0, EN60079-11, ATEX SIL2 according to IEC61508 / EN50402 / IEC 50271 / IEC 50270 (pending)

(*) Static conditions defined as temperature magnitude change rate < 3 °C/min. or relative humidity magnitude change rate < 3 %RH/min

